



MAXTRAX BRACKETS INSTALLATION GUIDE

APPLICATION: GREENLANE ROOF RACKS

PARTS LIST

GREENLANE MAXTRAX MOUNTING BRACKETS	2
5/16-18 X 3/4 BUTTON HEAD SOCKET CAP SCREW, 18-8 SS	4
5/16 Flat Washer Small OD, 18-8 SS	4
5/16 T-SLOT NUTS	4
5/16-18 X 3/4 BUTTON HEAD SOCKET CAP SCREW, 18-8 SS	4

TOOLS/EQUIPMENT REQUIRED

ALLEN WRENCH SET
ANTI-SEIZE/BLUE LOCKTITE
MAXTRAX (NOT INCLUDED)
MAXTRAX MOUNTING PINS (NOT INCLUDED)

TORQUE SPECS

THREAD SIZE	HEX BOLT HEAD	TORQUE
M6	10mm	8 ft/lb
M8	12 or 13 mm	18 ft/lb
M10	17mm	23 ft/lb
M12	19mm	50 ft/lb
M14	22mm	90 ft/lb
1/4-20	7/16 in	12 ft/lb
5/16-18	1/2 in	19 ft/lb
3/8-16	9/16 in	30 ft/lb

Installation Instructions:




1. Mount your MaxTrax posts to the Greenlane brackets provided. Note that the MaxTrax posts are not included with the MaxTrax mounting kit and must be purchased from MaxTrax.



2. If you are mounting your MaxTrax sideways, both brackets will mount on the same crossbar. If you prefer to mount your MaxTrax lengthwise, the brackets will mount on different crossbars. Pick where you would like it mounted and remove the corresponding crossbar(s).
3. Mount MaxTrax brackets to the crossbar(s) from your Greenlane roof rack. This is done by sliding in a T-slot nut into each groove of the crossbar, and aligning them with the bracket, as shown.



4. Loosely install the supplied bolts, but do not tighten so the bracket can still slide.

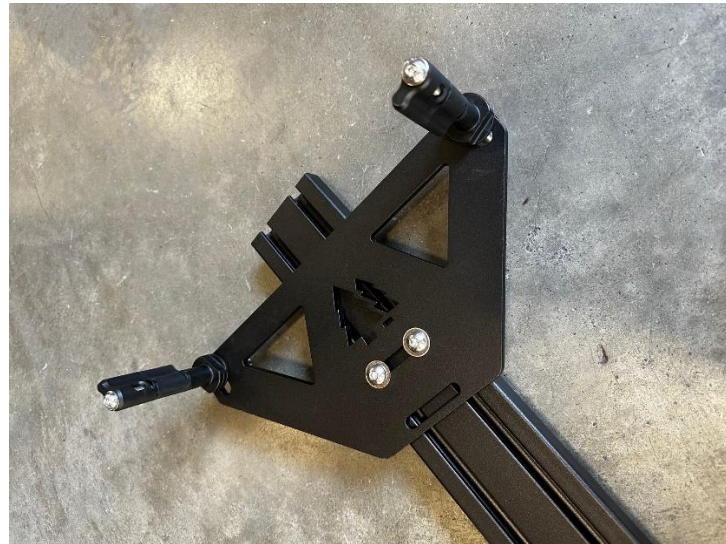


5. Align the 2 brackets so that the MaxTrax posts are 35 inches apart, and test fit your MaxTrax before tightening the bolts down.

6. Reinstall the crossbar(s) on your roof. Apply a small amount of anti-seize to the bolts going into the crossbar to ease in future removal.



7. Slide your MaxTrax over the posts and twist the top of the post to lock your boards in place.

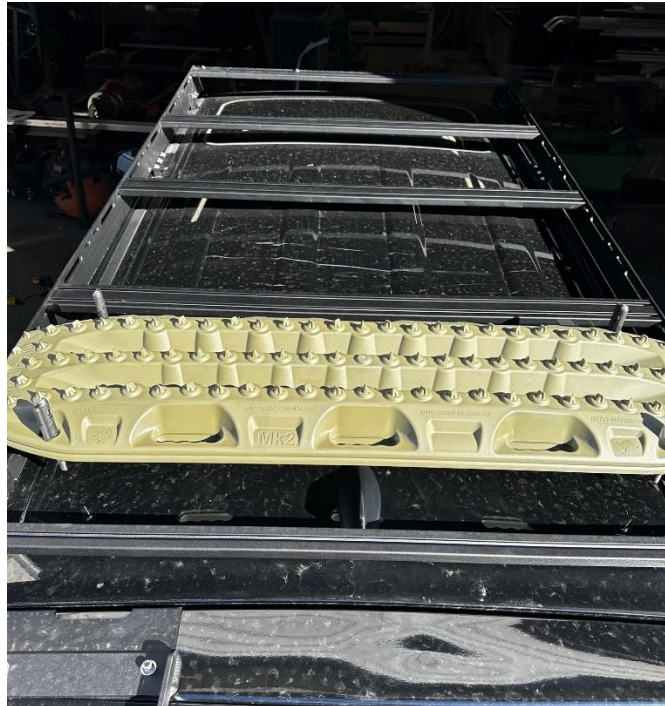

INSTALL COMPLETE